

Boleyn Cast Iron

590mm High

Specialist UK Manufacturer of Cast Iron Radiators




Our Boleyn cast iron radiator - also known as the “daisy radiator” - is an eye-catching decorative style cast iron radiator. Highly ornate, it is faithfully recreated from an original first produced in France in the 1890s. Depicting a wonderfully delicate floral daisy and ribbon design flowing from the ornate foot to the top of the stunning cast iron radiator. The Boleyn cast iron radiator is an ornate classic which will bring style and flair to any room.

The Boleyn daisy radiator looks magnificent finished in the choice of hand highlight paint finishes or indeed the hand polished finish which accentuates all the elaborate detail of this very distinctive cast iron radiator. The Boleyn is also available in 790mm high.



Code	Sections	Width (mm)	Heat Output				Dry Weight Kg	Water Content (Litres)	Wet Weight Kg
			At Delta T 50		At Delta T 60				
			BTUs	Watts	BTUs	Watts			
CI-BO590-03	3	249	1026	301	1297	380	24	4.5	28.5
CI-BO590-04	4	320	1368	401	1729	507	32	6	38
CI-BO590-05	5	392	1710	501	2161	633	40	7.5	47.5
CI-BO590-06	6	464	2052	601	2594	760	49	9	58
CI-BO590-07	7	535	2394	702	3026	887	57	10.5	67.5
CI-BO590-08	8	607	2736	802	3458	1014	65	12	77
CI-BO590-09	9	678	3078	902	3891	1140	73	13.5	86.5
CI-BO590-10	10	750	3420	1002	4323	1267	81	15	96
CI-BO590-11	11	822	3762	1103	4755	1394	89	16.5	105.5
CI-BO590-12	12	893	4104	1203	5187	1521	97	18	115
CI-BO590-13	13	965	4446	1303	5620	1647	105	19.5	124.5
CI-BO590-14	14	1036	4788	1403	6052	1773	113	21	134
CI-BO590-15	15	1108	5130	1504	6484	1901	121	22.5	143.5
CI-BO590-16	16	1180	5472	1604	6917	2027	129	24	153
CI-BO590-17	17	1251	5814	1704	7349	2154	137	25.5	162.5
CI-BO590-18	18	1323	6156	1804	7781	2280	145	27	172
CI-BO590-19	19	1394	6498	1904	8213	2407	154	28.5	182.5
CI-BO590-20	20	1466	6840	2005	8646	2534	162	30	192
CI-BO590-21	21	1538	7182	2105	9078	2661	170	31.5	201.5
CI-BO590-22	22	1609	7524	2205	9510	2787	178	33	211
CI-BO590-23	23	1681	7866	2305	9943	2914	186	34.5	220.5
CI-BO590-24	24	1752	8208	2406	10375	3041	194	36	230
CI-BO590-25	25	1824	8550	2506	10807	3168	202	37.5	239.5
CI-BO590-26	26	1896	8892	2606	11239	3294	210	39	249
CI-BO590-27	27	1967	9234	2706	11672	3420	218	40.5	258.5
CI-BO590-28	28	2039	9576	2807	12104	3548	226	42	268
CI-BO590-29	29	2110	9918	2907	12536	3674	234	43.5	277.5
CI-BO590-30	30	2182	10260	3007	12969	3801	242	45	287
CI-BO590-31	31	2254	10602	3107	13401	3927	251	46.5	297.5
CI-BO590-32	32	2325	10944	3208	13833	4055	259	48	307
CI-BO590-33	33	2397	11286	3308	14266	4181	267	49.5	316.5
CI-BO590-34	34	2468	11628	3408	14698	4308	275	51	326
CI-BO590-35	35	2540	11970	3508	15130	4434	283	52.5	335.5
CI-BO590-36	36	2612	12312	3608	15562	4561	291	54	345
CI-BO590-37	37	2683	12654	3709	15995	4688	299	55.5	354.5
CI-BO590-38	38	2755	12996	3809	16427	4815	307	57	364
CI-BO590-39	39	2826	13338	3909	16859	4941	315	58.5	373.5
CI-BO590-40	40	2898	13680	4009	17292	5067	323	60	383

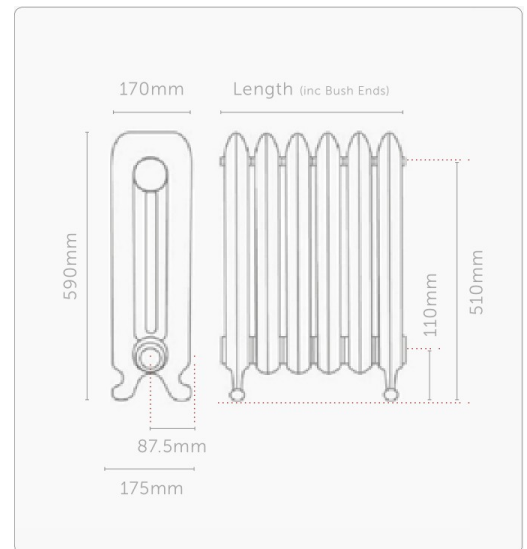

Lengths quoted are overall including bush ends and are given in good faith. However, due to the nature of the manufacturing process tolerances can and should be expected. Quoted dimensions should therefore only be used as a guideline.