

Boleyn Cast Iron

590mm High

Specialist UK Manufacturer of Cast Iron Radiators


Cast Iron Radiators
4U

Our Boleyn cast iron radiator - also known as the “daisy radiator” - is an eye-catching decorative style cast iron radiator. Highly ornate, it is faithfully recreated from an original first produced in France in the 1890s. Depicting a wonderfully delicate floral daisy and ribbon design flowing from the ornate foot to the top of the stunning cast iron radiator. The Boleyn cast iron radiator is an ornate classic which will bring style and flair to any room.

The Boleyn daisy radiator looks magnificent finished in the choice of hand highlight paint finishes or indeed the hand polished finish which accentuates all the elaborate detail of this very distinctive cast iron radiator. The Boleyn is also available in 790mm high.



Code	Sections	Width (mm)	Heat Output				Dry Weight Kg	Water Content (Litres)	Wet Weight Kg
			At Delta T 50		At Delta T 60				
			BTUs	Watts	BTUs	Watts			
CI-BO590-03	249	3	1297	380	1026	301	24	4.5	28.5
CI-BO590-04	320	4	1729	507	1368	401	32	6	38
CI-BO590-05	392	5	2161	633	1710	501	40	7.5	47.5
CI-BO590-06	464	6	2594	760	2052	601	49	9	58
CI-BO590-07	535	7	3026	887	2394	702	57	10.5	67.5
CI-BO590-08	607	8	3458	1014	2736	802	65	12	77
CI-BO590-09	678	9	3891	1140	3078	902	73	13.5	86.5
CI-BO590-10	750	10	4323	1267	3420	1002	81	15	96
CI-BO590-11	822	11	4755	1394	3762	1103	89	16.5	105.5
CI-BO590-12	893	12	5187	1521	4104	1203	97	18	115
CI-BO590-13	965	13	5620	1647	4446	1303	105	19.5	124.5
CI-BO590-14	1036	14	6052	1773	4788	1403	113	21	134
CI-BO590-15	1108	15	6484	1901	5130	1504	121	22.5	143.5
CI-BO590-16	1180	16	6917	2027	5472	1604	129	24	153
CI-BO590-17	1251	17	7349	2154	5814	1704	137	25.5	162.5
CI-BO590-18	1323	18	7781	2280	6156	1804	145	27	172
CI-BO590-19	1394	19	8213	2407	6498	1904	154	28.5	182.5
CI-BO590-20	1466	20	8646	2534	6840	2005	162	30	192
CI-BO590-21	1538	21	9078	2661	7182	2105	170	31.5	201.5
CI-BO590-22	1609	22	9510	2787	7524	2205	178	33	211
CI-BO590-23	1681	23	9943	2914	7866	2305	186	34.5	220.5
CI-BO590-24	1752	24	10375	3041	8208	2406	194	36	230
CI-BO590-25	1824	25	10807	3168	8550	2506	202	37.5	239.5
CI-BO590-26	1896	26	11239	3294	8892	2606	210	39	249
CI-BO590-27	1967	27	11672	3420	9234	2706	218	40.5	258.5
CI-BO590-28	2039	28	12104	3548	9576	2807	226	42	268
CI-BO590-29	2110	29	12536	3674	9918	2907	234	43.5	277.5
CI-BO590-30	2182	30	12969	3801	10260	3007	242	45	287
CI-BO590-31	2254	31	13401	3927	10602	3107	251	46.5	297.5
CI-BO590-32	2325	32	13833	4055	10944	3208	259	48	307
CI-BO590-33	2397	33	14266	4181	11286	3308	267	49.5	316.5
CI-BO590-34	2468	34	14698	4308	11628	3408	275	51	326
CI-BO590-35	2540	35	15130	4434	11970	3508	283	52.5	335.5
CI-BO590-36	2612	36	15562	4561	12312	3608	291	54	345
CI-BO590-37	2683	37	15995	4688	12654	3709	299	55.5	354.5
CI-BO590-38	2755	38	16427	4815	12996	3809	307	57	364
CI-BO590-39	2826	39	16859	4941	13338	3909	315	58.5	373.5
CI-BO590-40	2898	40	17292	5067	13680	4009	323	60	383

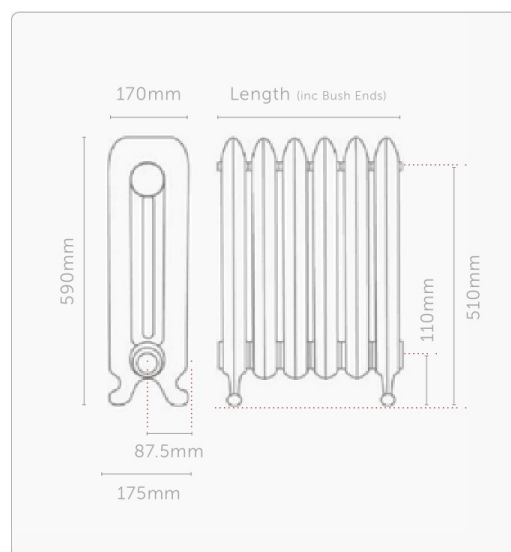

Lengths quoted are overall including bush ends and are given in good faith. However, due to the nature of the manufacturing process tolerances can and should be expected. Quoted dimensions should therefore only be used as a guideline.