

# Cromwell Cast Iron

## 750mm High

Specialist UK Manufacturer of Cast Iron Radiators




The Cromwell cast iron radiator is an elegant and stylish ornate cast iron radiator echoing a bygone era and a popular choice for the traditional refurbishment, new build, barn or warehouse conversion. Our Cromwell radiator fits well within the contemporary or period home. The Cromwell cast iron radiator is a free standing radiator, beautifully etched with a scroll-like design which flows throughout its length.

If you are looking for a striking living room, hallway or kitchen radiator the Cromwell radiator offers that old cast iron radiator look with real style. Custom finished in a polished or antiqued paint effect the Cromwell cast iron range looks fantastic as these finishes will accentuate the beautiful scrolling detail depicted on this cast iron radiator. Cromwell is also available in 580mm high or with a magnificent etched crown at 780mm high.



Code	Sections	Width (mm)	Heat Output				Dry Weight Kg	Water Content (Litres)	Wet Weight Kg
			At Delta T 50		At Delta T 60				
			BTUs	Watts	BTUs	Watts			
CI-CR750-03	3	247	1160	340	1466	430	20	4.5	24.5
CI-CR750-04	4	318	1546	453	1954	573	27	6	33
CI-CR750-05	5	389	1933	566	2443	715	34	7.5	41.5
CI-CR750-06	6	460	2319	680	2931	860	41	9	50
CI-CR750-07	7	531	2706	793	3420	1002	47	10.5	57.5
CI-CR750-08	8	602	3092	906	3908	1145	54	12	66
CI-CR750-09	9	673	3479	1020	4397	1289	61	13.5	74.5
CI-CR750-10	10	744	3865	1133	4885	1432	68	15	83
CI-CR750-11	11	815	4252	1246	5375	1575	74	16.5	90.5
CI-CR750-12	12	886	4638	1359	5862	1718	81	18	99
CI-CR750-13	13	957	5025	1473	6352	1862	88	19.5	107.5
CI-CR750-14	14	1028	5411	1586	6840	2005	95	21	116
CI-CR750-15	15	1099	5798	1699	7329	2148	101	22.5	123.5
CI-CR750-16	16	1170	6184	1812	7817	2290	108	24	132
CI-CR750-17	17	1241	6571	1926	8306	2434	115	25.5	140.5
CI-CR750-18	18	1312	6957	2039	8794	2577	122	27	149
CI-CR750-19	19	1383	7344	2152	9283	2720	128	28.5	156.5
CI-CR750-20	20	1454	7730	2266	9771	2864	135	30	165
CI-CR750-21	21	1525	8117	2379	10260	3007	142	31.5	173.5
CI-CR750-22	22	1596	8503	2492	10748	3150	149	33	182
CI-CR750-23	23	1667	8890	2606	11237	3294	156	34.5	190.5
CI-CR750-24	24	1738	9276	2719	11725	3437	162	36	198
CI-CR750-25	25	1809	9663	2832	12214	3580	169	37.5	206.5
CI-CR750-26	26	1880	10049	2945	12702	3722	176	39	215
CI-CR750-27	27	1951	10436	3059	13191	3867	183	40.5	223.5
CI-CR750-28	28	2022	10822	3172	13679	4009	189	42	231
CI-CR750-29	29	2093	11209	3285	14168	4152	196	43.5	239.5
CI-CR750-30	30	2164	11595	3398	14656	4295	203	45	248
CI-CR750-31	31	2235	11982	3512	15145	4439	210	46.5	256.5
CI-CR750-32	32	2306	12368	3625	15633	4582	216	48	264
CI-CR750-33	33	2377	12755	3738	16122	4725	223	49.5	272.5
CI-CR750-34	34	2448	13141	3851	16610	4868	230	51	281
CI-CR750-35	35	2519	13528	3965	17099	5012	237	52.5	289.5
CI-CR750-36	36	2590	13914	4078	17587	5155	243	54	297
CI-CR750-37	37	2661	14301	4191	18076	5297	250	55.5	305.5
CI-CR750-38	38	2732	14687	4305	18564	5442	257	57	314
CI-CR750-39	39	2803	15074	4418	19054	5584	264	58.5	322.5
CI-CR750-40	40	2874	15460	4531	19541	5727	270	60	330

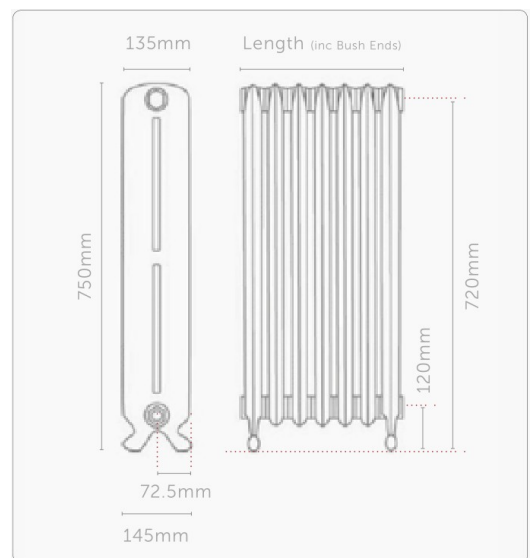

Lengths quoted are overall including bush ends and are given in good faith. However, due to the nature of the manufacturing process tolerances can and should be expected. Quoted dimensions should therefore only be used as a guideline.