


Georgian 2 1040mm High

Specialist UK Manufacturer of Cast Iron Radiators


Cast Iron
Radiators
4u

Our Georgian 2 column slim cast iron radiators are a slimline traditional Arts and Crafts design offering a versatile choice that is perfect for the wall hung cast iron radiator and when space is at a premium.

The choice of heights within the Georgian 2 column slimline range provides plenty of alternatives for low window spaces and attic rooms as well as the larger, taller wall hung radiators required for hallways and large reception rooms. These classic Georgian 2 column slim cast iron radiators are all only 90mm in depth and are also available in 490mm, 640mm, and 740mm High.

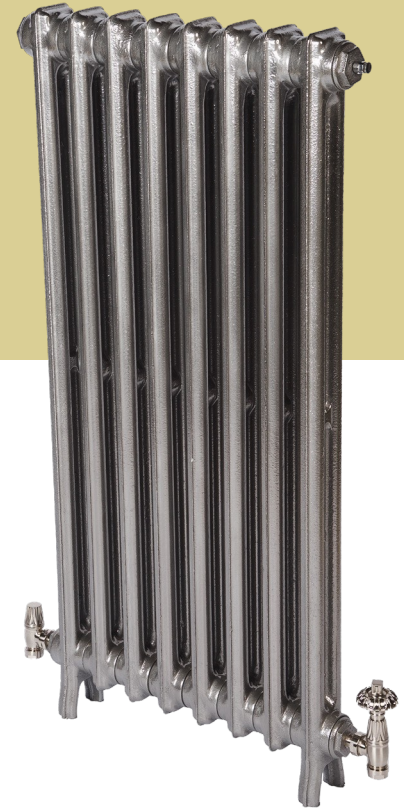

Code	Sections	Width (mm)	Heat Output				Dry Weight Kg	Water Content (Litres)	Wet Weight Kg
			At Delta T 50		At Delta T 60				
			BTUs	Watts	BTUs	Watts			
CI-NE1040-2-03	3	208	757	222	957	280	15.5	2.4	17.9
CI-NE1040-2-04	4	269	1010	296	1277	374	20.6	3.2	23.8
CI-NE1040-2-05	5	330	1262	370	1595	467	25.8	4.0	29.8
CI-NE1040-2-06	6	391	1515	444	1915	561	30.9	4.8	35.7
CI-NE1040-2-07	7	452	1767	518	2233	654	36.1	5.6	41.7
CI-NE1040-2-08	8	512	2020	592	2553	748	41.2	6.4	47.6
CI-NE1040-2-09	9	573	2272	666	2872	842	46.4	7.2	53.6
CI-NE1040-2-10	10	634	2525	740	3192	936	51.5	8.0	59.5
CI-NE1040-2-11	11	695	2777	814	3510	1029	56.7	8.8	65.5
CI-NE1040-2-12	12	756	3030	888	3830	1123	61.8	9.6	71.4
CI-NE1040-2-13	13	816	3282	962	4148	1216	67.0	10.4	77.4
CI-NE1040-2-14	14	877	3535	1036	4468	1309	72.1	11.2	83.3
CI-NE1040-2-15	15	938	3787	1110	4787	1403	77.3	12.0	89.3
CI-NE1040-2-16	16	999	4040	1184	5107	1497	82.4	12.8	95.2
CI-NE1040-2-17	17	1060	4292	1258	5425	1590	87.6	13.6	101.2
CI-NE1040-2-18	18	1120	4545	1332	5745	1684	92.7	14.4	107.1
CI-NE1040-2-19	19	1181	4797	1406	6063	1777	97.9	15.2	113.1
CI-NE1040-2-20	20	1242	5050	1480	6383	1871	103.0	16.0	119.0
CI-NE1040-2-21	21	1303	5302	1554	6702	1964	108.2	16.8	125.0
CI-NE1040-2-22	22	1364	5555	1628	7022	2058	113.3	17.6	130.9
CI-NE1040-2-23	23	1424	5807	1702	7340	2151	118.5	18.4	136.9
CI-NE1040-2-24	24	1485	6060	1776	7660	2245	123.6	19.2	142.8
CI-NE1040-2-25	25	1546	6312	1850	7978	2338	128.8	20.0	148.8
CI-NE1040-2-26	26	1607	6565	1924	8298	2432	133.9	20.8	154.7
CI-NE1040-2-27	27	1668	6817	1998	8617	2525	139.1	21.6	160.7
CI-NE1040-2-28	28	1728	7070	2072	8936	2619	144.2	22.4	166.6
CI-NE1040-2-29	29	1789	7322	2146	9255	2712	149.4	23.2	172.6
CI-NE1040-2-30	30	1850	7575	2220	9575	2806	154.5	24.0	178.5
CI-NE1040-2-31	31	1911	7827	2294	9893	2899	159.7	24.8	184.5
CI-NE1040-2-32	32	1972	8080	2368	10213	2993	164.8	25.6	190.4
CI-NE1040-2-33	33	2032	8332	2442	10532	3087	170.0	26.4	196.4
CI-NE1040-2-34	34	2093	8585	2516	10851	3180	175.1	27.2	202.3
CI-NE1040-2-35	35	2154	8837	2590	11170	3274	180.3	28.0	208.3
CI-NE1040-2-36	36	2215	9090	2664	11490	3368	185.4	28.8	214.2
CI-NE1040-2-37	37	2276	9342	2738	11808	3461	190.6	29.6	220.2
CI-NE1040-2-38	38	2336	9595	2812	12128	3555	195.7	30.4	226.1
CI-NE1040-2-39	39	2397	9847	2886	12447	3648	200.9	31.2	232.1
CI-NE1040-2-40	40	2458	10100	2960	12766	3742	206.0	32.0	238.0

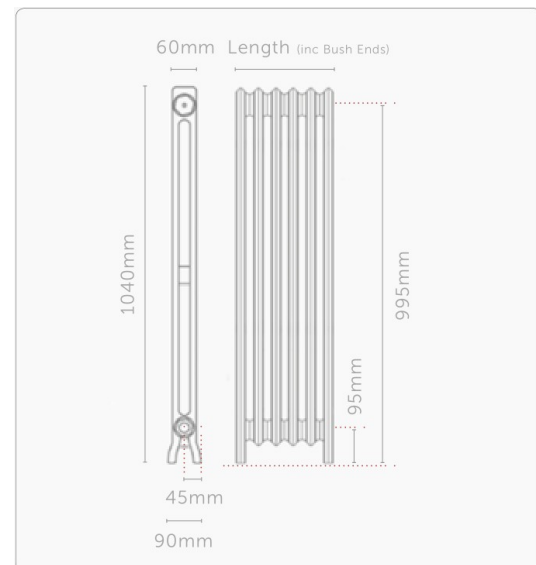

Lengths quoted are overall including bush ends and are given in good faith. However, due to the nature of the manufacturing process tolerances can and should be expected. Quoted dimensions should therefore only be used as a guideline.