

Georgian 2

490mm High

Specialist UK Manufacturer of Cast Iron Radiators




Our Georgian 2 column slim cast iron radiators are a slimline traditional Arts and Crafts design offering a versatile choice that is perfect for the wall hung cast iron radiator and when space is at a premium.

The choice of heights within the Georgian 2 column slimline range provides plenty of alternatives for low window spaces and attic rooms as well as the larger, taller wall hung radiators required for hallways and large reception rooms. These classic Georgian 2 column slim cast iron radiators are all only 90mm in depth and are also available in 640mm, 740mm, and 1040mm High.



Code	Sections	Width (mm)	Heat Output				Dry Weight Kg	Water Content (Litres)	Wet Weight Kg
			At Delta T 50		At Delta T 60				
			BTUs	Watts	BTUs	Watts			
CI-NE490-2-03	3	208	420	123	531	156	7.8	1.1	8.9
CI-NE490-2-04	4	269	560	164	708	208	10.4	1.4	11.8
CI-NE490-2-05	5	330	699	205	884	259	13.0	1.8	14.8
CI-NE490-2-06	6	391	839	246	1060	311	15.6	2.2	17.8
CI-NE490-2-07	7	452	979	287	1237	363	18.2	2.5	20.7
CI-NE490-2-08	8	512	1119	328	1414	414	20.8	2.9	23.7
CI-NE490-2-09	9	573	1259	369	1591	466	23.4	3.2	26.6
CI-NE490-2-10	10	634	1399	410	1768	518	26.0	3.6	29.6
CI-NE490-2-11	11	695	1539	451	1945	570	28.6	4.0	32.6
CI-NE490-2-12	12	756	1679	492	2122	622	31.2	4.3	35.5
CI-NE490-2-13	13	816	1819	533	2299	674	33.8	4.7	38.5
CI-NE490-2-14	14	877	1958	574	2475	725	36.4	5.0	41.4
CI-NE490-2-15	15	938	2098	615	2652	777	39.0	5.4	44.4
CI-NE490-2-16	16	999	2238	656	2829	829	41.6	5.8	47.4
CI-NE490-2-17	17	1060	2378	697	3006	881	44.2	6.1	50.3
CI-NE490-2-18	18	1120	2518	738	3183	933	46.8	6.5	53.3
CI-NE490-2-19	19	1181	2658	779	3360	985	49.4	6.8	56.2
CI-NE490-2-20	20	1242	2798	820	3537	1037	52.0	7.2	59.2
CI-NE490-2-21	21	1303	2938	861	3714	1089	54.6	7.6	62.2
CI-NE490-2-22	22	1364	3078	902	3891	1140	57.2	7.9	65.1
CI-NE490-2-23	23	1424	3218	943	4068	1192	59.8	8.3	68.1
CI-NE490-2-24	24	1485	3357	984	4243	1244	62.4	8.6	71.0
CI-NE490-2-25	25	1546	3497	1025	4420	1295	65.0	9.0	74.0
CI-NE490-2-26	26	1607	3637	1066	4597	1347	67.6	9.4	77.0
CI-NE490-2-27	27	1668	3777	1107	4774	1399	70.2	9.7	79.9
CI-NE490-2-28	28	1728	3917	1148	4951	1451	72.8	10.1	82.9
CI-NE490-2-29	29	1789	4057	1189	5128	1503	75.4	10.4	85.8
CI-NE490-2-30	30	1850	4197	1230	5305	1555	78.0	10.8	88.8
CI-NE490-2-31	31	1911	4337	1271	5482	1607	80.6	11.2	91.8
CI-NE490-2-32	32	1972	4477	1312	5659	1659	83.2	11.5	94.7
CI-NE490-2-33	33	2032	4616	1353	5835	1710	85.8	11.9	97.7
CI-NE490-2-34	34	2093	4756	1394	6012	1762	88.4	12.2	100.6
CI-NE490-2-35	35	2154	4896	1435	6189	1814	91.0	12.6	103.6
CI-NE490-2-36	36	2215	5036	1476	6366	1866	93.6	13.0	106.6
CI-NE490-2-37	37	2276	5176	1517	6542	1917	96.2	13.3	109.5
CI-NE490-2-38	38	2336	5316	1558	6719	1969	98.8	13.7	112.5
CI-NE490-2-39	39	2397	5456	1599	6896	2021	101.4	14.0	115.4
CI-NE490-2-40	40	2458	5596	1640	7073	2073	104.0	14.4	118.4

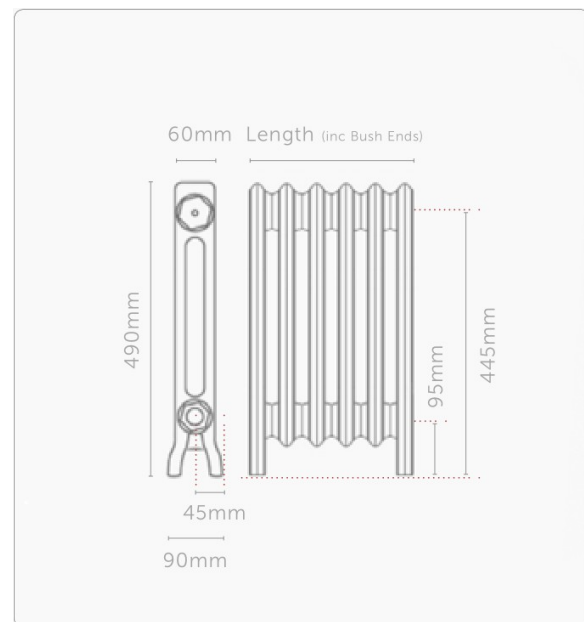

Lengths quoted are overall including bush ends and are given in good faith. However, due to the nature of the manufacturing process tolerances can and should be expected. Quoted dimensions should therefore only be used as a guideline.