

Richmond 4 Cast Iron

460mm High

Specialist UK Manufacturer of Cast Iron Radiators


Cast Iron Radiators
4U

Our beautiful range of Richmond 4-column cast iron radiators were originally designed for maximum heat efficiency and versatility of use, ideal for both large and small rooms, befitting every decor with its simple classic lines. A timeless cast iron 4-column radiator which complements both the period and modern home.

This classic late Richmond 4-column cast iron radiator is 143mm deep. The Richmond 4-column range is also available in 660mm, 760mm and 813mm High.



Code	Sections	Width (mm)	Heat Output				Dry Weight Kg	Water Content (Litres)	Wet Weight Kg
			At Delta T 50		At Delta T 60				
			BTUs	Watts	BTUs	Watts			
CI-RC460-03	3	216	675	198	853	250	9.8	1.5	11.3
CI-RC460-04	4	277	900	264	1138	334	13.1	2.0	15.1
CI-RC460-05	5	338	1125	330	1422	417	16.4	2.5	18.9
CI-RC460-06	6	398	1350	396	1706	500	19.7	3.0	22.7
CI-RC460-07	7	459	1575	462	1991	584	23.0	3.5	26.5
CI-RC460-08	8	520	1800	528	2275	667	26.2	4.0	30.2
CI-RC460-09	9	580	2025	593	2560	750	29.5	4.5	34.0
CI-RC460-10	10	641	2250	659	2844	834	32.8	5.0	37.8
CI-RC460-11	11	702	2475	725	3128	917	36.1	5.5	41.6
CI-RC460-12	12	762	2700	791	3413	1000	39.4	6.0	45.4
CI-RC460-13	13	823	2925	857	3697	1084	42.6	6.5	49.1
CI-RC460-14	14	884	3150	923	3982	1167	45.9	7.0	52.9
CI-RC460-15	15	945	3375	989	4266	1250	49.2	7.5	56.7
CI-RC460-16	16	1005	3600	1055	4550	1334	52.5	8.0	60.5
CI-RC460-17	17	1066	3825	1121	4835	1417	55.8	8.5	64.3
CI-RC460-18	18	1127	4050	1187	5119	1500	59.0	9.0	68.0
CI-RC460-19	19	1187	4275	1253	5404	1584	62.3	9.5	71.8
CI-RC460-20	20	1248	4500	1319	5688	1667	65.6	10.0	75.6
CI-RC460-21	21	1309	4725	1385	5972	1750	68.9	10.5	79.4
CI-RC460-22	22	1369	4950	1451	6257	1834	72.2	11.0	83.2
CI-RC460-23	23	1430	5175	1517	6541	1917	75.4	11.5	86.9
CI-RC460-24	24	1491	5400	1583	6826	2001	78.7	12.0	90.7
CI-RC460-25	25	1552	5625	1649	7110	2084	82.0	12.5	94.5
CI-RC460-26	26	1612	5850	1715	7394	2167	85.3	13.0	98.3
CI-RC460-27	27	1673	6075	1780	7679	2251	88.6	13.5	102.1
CI-RC460-28	28	1734	6300	1846	7963	2334	91.8	14.0	105.8
CI-RC460-29	29	1794	6525	1912	8248	2417	95.1	14.5	109.6
CI-RC460-30	30	1855	6750	1978	8532	2501	98.4	15.0	113.4
CI-RC460-31	31	1916	6975	2044	8816	2584	101.7	15.5	117.2
CI-RC460-32	32	1976	7200	2110	9101	2667	105.0	16.0	121.0
CI-RC460-33	33	2037	7425	2176	9385	2751	108.2	16.5	124.7
CI-RC460-34	34	2098	7650	2242	9670	2834	111.5	17.0	128.5
CI-RC460-35	35	2159	7875	2308	9954	2917	114.8	17.5	132.3
CI-RC460-36	36	2219	8100	2374	10238	3001	118.1	18.0	136.1
CI-RC460-37	37	2280	8325	2440	10523	3084	121.4	18.5	139.9
CI-RC460-38	38	2341	8550	2506	10807	3167	124.6	19.0	143.6
CI-RC460-39	39	2401	8775	2572	11092	3251	127.9	19.5	147.4
CI-RC460-40	40	2462	9000	2638	11376	3334	131.2	20.0	151.2

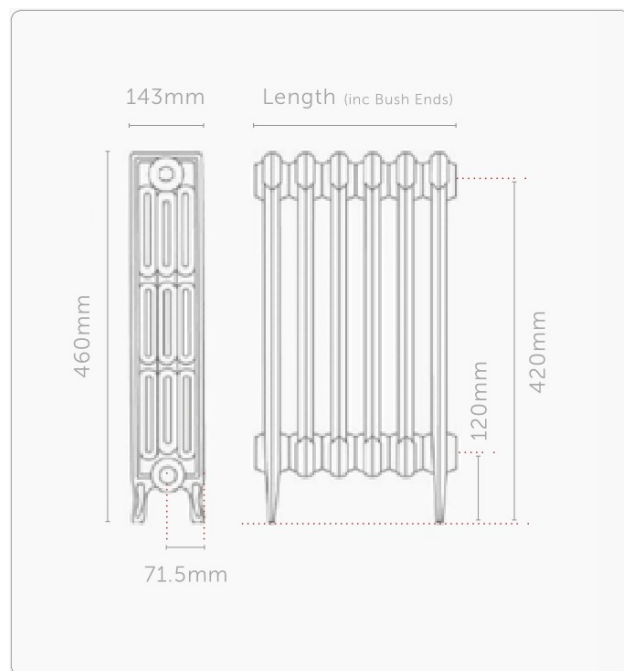

Lengths quoted are overall including bush ends and are given in good faith. However, due to the nature of the manufacturing process tolerances can and should be expected. Quoted dimensions should therefore only be used as a guideline.