

Rochester Cast Iron

470mm High

Specialist UK Manufacturer of Cast Iron Radiators




Our magnificent Rochester cast iron radiator is an ornate radiator range faithfully recreated from one of the original decorative cast iron radiators produced in France in the late 1800s. The stunning Rochester cast iron radiator design incorporates a sweeping scalloped top detail with delicately ornate interwoven decoration which is also depicted around the foot detail of this glorious cast iron radiator.

A substantial free standing cast iron radiator it is perfect for the larger period room, barn or warehouse conversion. A tremendously heat-efficient cast iron radiator when exceptional heat is required for larger room spaces. The Rochester is also available in 570mm and 765mm high.



Code	Sections	Width (mm)	Heat Output				Dry Weight Kg	Water Content (Litres)	Wet Weight Kg
			At Delta T 50		At Delta T 60				
			BTUs	Watts	BTUs	Watts			
CI-RO470-03	3	278	1089	319	1376	403	25	5.1	30.1
CI-RO470-04	4	359	1452	426	1835	538	33	6.8	39.8
CI-RO470-05	5	440	1815	532	2294	672	41	8.5	49.5
CI-RO470-06	6	521	2178	638	2753	806	49	10.2	59.2
CI-RO470-07	7	602	2541	745	3212	942	58	11.9	69.9
CI-RO470-08	8	684	2904	851	3671	1076	66	13.6	79.6
CI-RO470-09	9	765	3267	958	4129	1211	74	15.3	89.3
CI-RO470-10	10	846	3630	1064	4588	1345	82	17	99
CI-RO470-11	11	927	3993	1170	5047	1479	91	18.7	109.7
CI-RO470-12	12	1008	4356	1277	5506	1614	99	20.4	119.4
CI-RO470-13	13	1090	4719	1383	5965	1748	107	22.1	129.1
CI-RO470-14	14	1171	5082	1489	6424	1882	115	23.8	138.8
CI-RO470-15	15	1252	5445	1596	6882	2017	124	25.5	149.5
CI-RO470-16	16	1333	5808	1702	7341	2151	132	27.2	159.2
CI-RO470-17	17	1414	6171	1809	7800	2287	140	28.9	168.9
CI-RO470-18	18	1496	6534	1915	8259	2421	148	30.6	178.6
CI-RO470-19	19	1577	6897	2021	8718	2555	157	32.3	189.3
CI-RO470-20	20	1658	7260	2128	9177	2690	165	34	199
CI-RO470-21	21	1739	7623	2234	9635	2824	173	35.7	208.7
CI-RO470-22	22	1820	7986	2341	10094	2959	181	37.4	218.4
CI-RO470-23	23	1902	8349	2447	10553	3093	189	39.1	228.1
CI-RO470-24	24	1983	8712	2553	11012	3227	198	40.8	238.8
CI-RO470-25	25	2064	9075	2660	11471	3362	206	42.5	248.5
CI-RO470-26	26	2145	9438	2766	11930	3496	214	44.2	258.2
CI-RO470-27	27	2226	9801	2873	12388	3631	223	45.9	268.9
CI-RO470-28	28	2308	10164	2979	12847	3765	231	47.6	278.6
CI-RO470-29	29	2389	10527	3085	13306	3899	239	49.3	288.3
CI-RO470-30	30	2470	10890	3192	13765	4035	247	51	298
CI-RO470-31	31	2551	11253	3298	14224	4169	255	52.7	307.7
CI-RO470-32	32	2632	11616	3404	14683	4303	264	54.4	318.4
CI-RO470-33	33	2714	11979	3511	15141	4438	272	56.1	328.1
CI-RO470-34	34	2795	12342	3617	15600	4572	280	57.8	337.8
CI-RO470-35	35	2876	12705	3724	16059	4707	288	59.5	347.5
CI-RO470-36	36	2957	13068	3830	16518	4841	297	61.2	358.2
CI-RO470-37	37	3038	13431	3936	16977	4975	305	62.9	367.9
CI-RO470-38	38	3120	13794	4043	17436	5110	313	64.6	377.6
CI-RO470-39	39	3201	14157	4149	17894	5244	321	66.3	387.3
CI-RO470-40	40	3282	14520	4256	18353	5380	330	68	398

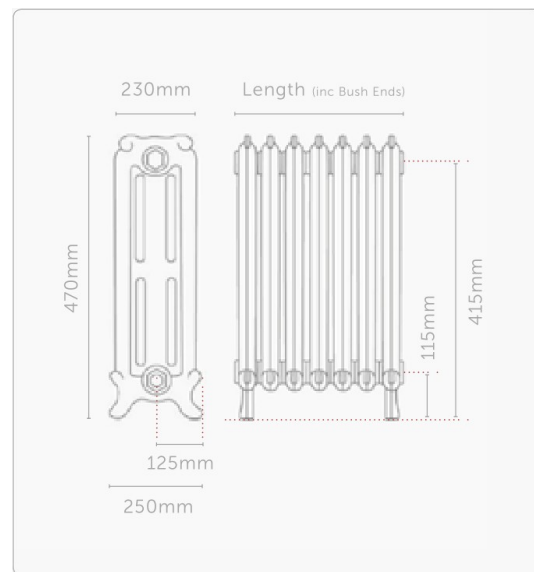

Lengths quoted are overall including bush ends and are given in good faith. However, due to the nature of the manufacturing process tolerances can and should be expected. Quoted dimensions should therefore only be used as a guideline.