

Shelbourne 3 Cast Iron Radiators

450mm High

Specialist UK Manufacturer of Cast Iron Radiators


Cast Iron Radiators
4U

Our beautiful range of Shelbourne 3 column cast iron radiators were originally designed for maximum heat efficiency and versatility of use, ideal for both large and small rooms, befitting every decor with its simple classic lines.

At only 120mm in depth the 3 column Shelbourne is a perfect choice for those rooms where space is at a premium yet style is paramount. This classic Shelbourne 3 column cast iron radiator is also available in 645mm and 745mm High.



| Code | Sections | Width (mm) | Heat Output | | | | Dry Weight Kg | Water Content (Litres) | Wet Weight Kg |
|-------------|----------|------------|---------------|-------|---------------|-------|---------------|------------------------|---------------|
| | | | At Delta T 50 | | At Delta T 60 | | | | |
| | | | BTUs | Watts | BTUs | Watts | | | |
| CI-SH450-03 | 3 | 215 | 822 | 241 | 1039 | 305 | 9.5 | 1.7 | 11.2 |
| CI-SH450-04 | 4 | 275 | 1096 | 321 | 1385 | 406 | 12.7 | 2.2 | 14.9 |
| CI-SH450-05 | 5 | 335 | 1370 | 402 | 1732 | 508 | 15.9 | 2.8 | 18.7 |
| CI-SH450-06 | 6 | 395 | 1644 | 482 | 2078 | 609 | 19.1 | 3.3 | 22.4 |
| CI-SH450-07 | 7 | 455 | 1918 | 562 | 2424 | 710 | 22.3 | 3.9 | 26.1 |
| CI-SH450-08 | 8 | 516 | 2192 | 642 | 2771 | 812 | 25.4 | 4.4 | 29.8 |
| CI-SH450-09 | 9 | 576 | 2466 | 723 | 3117 | 914 | 28.6 | 5.0 | 33.6 |
| CI-SH450-10 | 10 | 636 | 2740 | 803 | 3463 | 1015 | 31.8 | 5.5 | 37.3 |
| CI-SH450-11 | 11 | 696 | 3014 | 883 | 3810 | 1117 | 35.0 | 6.1 | 41.0 |
| CI-SH450-12 | 12 | 756 | 3288 | 964 | 4156 | 1218 | 38.2 | 6.6 | 44.8 |
| CI-SH450-13 | 13 | 817 | 3562 | 1044 | 4502 | 1319 | 41.3 | 7.2 | 48.5 |
| CI-SH450-14 | 14 | 877 | 3836 | 1124 | 4849 | 1421 | 44.5 | 7.7 | 52.2 |
| CI-SH450-15 | 15 | 937 | 4110 | 1205 | 5195 | 1523 | 47.7 | 8.3 | 56.0 |
| CI-SH450-16 | 16 | 997 | 4384 | 1285 | 5541 | 1624 | 50.9 | 8.8 | 59.7 |
| CI-SH450-17 | 17 | 1057 | 4658 | 1365 | 5888 | 1726 | 54.1 | 9.4 | 63.4 |
| CI-SH450-18 | 18 | 1118 | 4932 | 1445 | 6234 | 1827 | 57.2 | 9.9 | 67.1 |
| CI-SH450-19 | 19 | 1178 | 5206 | 1526 | 6580 | 1928 | 60.4 | 10.5 | 70.9 |
| CI-SH450-20 | 20 | 1238 | 5480 | 1606 | 6927 | 2030 | 63.6 | 11.0 | 74.6 |
| CI-SH450-21 | 21 | 1298 | 5754 | 1686 | 7273 | 2132 | 66.8 | 11.6 | 78.3 |
| CI-SH450-22 | 22 | 1358 | 6028 | 1767 | 7619 | 2233 | 70.0 | 12.1 | 82.1 |
| CI-SH450-23 | 23 | 1419 | 6302 | 1847 | 7966 | 2335 | 73.1 | 12.7 | 85.8 |
| CI-SH450-24 | 24 | 1479 | 6576 | 1927 | 8312 | 2436 | 76.3 | 13.2 | 89.5 |
| CI-SH450-25 | 25 | 1539 | 6850 | 2008 | 8658 | 2538 | 79.5 | 13.8 | 93.3 |
| CI-SH450-26 | 26 | 1599 | 7124 | 2088 | 9005 | 2639 | 82.7 | 14.3 | 97.0 |
| CI-SH450-27 | 27 | 1659 | 7398 | 2168 | 9351 | 2741 | 85.9 | 14.9 | 100.7 |
| CI-SH450-28 | 28 | 1720 | 7672 | 2249 | 9697 | 2842 | 89.0 | 15.4 | 104.4 |
| CI-SH450-29 | 29 | 1780 | 7946 | 2329 | 10044 | 2944 | 92.2 | 16.0 | 108.2 |
| CI-SH450-30 | 30 | 1840 | 8220 | 2409 | 10390 | 3045 | 95.4 | 16.5 | 111.9 |
| CI-SH450-31 | 31 | 1900 | 8494 | 2489 | 10736 | 3147 | 98.6 | 17.1 | 115.6 |
| CI-SH450-32 | 32 | 1960 | 8768 | 2570 | 11083 | 3248 | 101.8 | 17.6 | 119.4 |
| CI-SH450-33 | 33 | 2021 | 9042 | 2650 | 11429 | 3350 | 104.9 | 18.2 | 123.1 |
| CI-SH450-34 | 34 | 2081 | 9316 | 2730 | 11775 | 3451 | 108.1 | 18.7 | 126.8 |
| CI-SH450-35 | 35 | 2141 | 9590 | 2811 | 12122 | 3553 | 111.3 | 19.3 | 130.6 |
| CI-SH450-36 | 36 | 2201 | 9864 | 2891 | 12468 | 3654 | 114.5 | 19.8 | 134.3 |
| CI-SH450-37 | 37 | 2261 | 10138 | 2971 | 12814 | 3756 | 117.7 | 20.4 | 138.0 |
| CI-SH450-38 | 38 | 2322 | 10412 | 3052 | 13161 | 3857 | 120.8 | 20.9 | 141.7 |
| CI-SH450-39 | 39 | 2382 | 10686 | 3132 | 13507 | 3959 | 124.0 | 21.5 | 145.5 |
| CI-SH450-40 | 40 | 2442 | 10960 | 3212 | 13853 | 4060 | 127.2 | 22.0 | 149.2 |

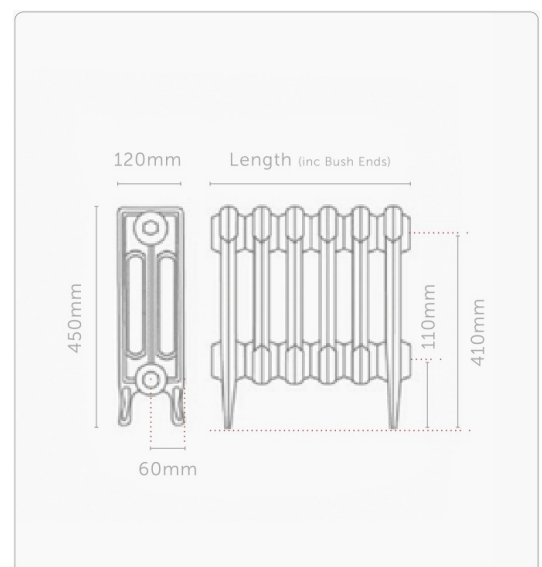

Lengths quoted are overall including bush ends and are given in good faith. However, due to the nature of the manufacturing process tolerances can and should be expected. Quoted dimensions should therefore only be used as a guideline.