

# Shelbourne 3 Cast Iron 745mm High

Specialist UK Manufacturer of Cast Iron Radiators




Our beautiful range of Shelbourne 3 column cast iron radiators were originally designed for maximum heat efficiency and versatility of use, ideal for both large and small rooms, befitting every decor with its simple classic lines.

At only 120mm in depth the 3 column Shelbourne is a perfect choice for those rooms where space is at a premium yet style is paramount. This classic Shelbourne 3 column cast iron radiator is also available in 450mm and 645mm High.



Code	Sections	Width (mm)	Heat Output				Dry Weight Kg	Water Content (Litres)	Wet Weight Kg
			At Delta T 50		At Delta T 60				
			BTUs	Watts	BTUs	Watts			
CI-SH745-03	3	218	1230	360	1555	456	16.8	3.0	19.8
CI-SH745-04	4	280	1640	481	2073	608	22.4	4.0	26.4
CI-SH745-05	5	341	2050	601	2591	759	28.0	5.0	33.0
CI-SH745-06	6	402	2460	721	3109	911	33.6	6.0	39.6
CI-SH745-07	7	464	2870	841	3628	1063	39.2	7.0	46.2
CI-SH745-08	8	525	3280	961	4146	1215	44.8	8.0	52.8
CI-SH745-09	9	587	3690	1081	4664	1367	50.4	9.0	59.4
CI-SH745-10	10	648	4100	1202	5182	1519	56.0	10.0	66.0
CI-SH745-11	11	709	4510	1322	5701	1671	61.6	11.0	72.6
CI-SH745-12	12	771	4920	1442	6219	1823	67.2	12.0	79.2
CI-SH745-13	13	832	5330	1562	6737	1975	72.8	13.0	85.8
CI-SH745-14	14	894	5740	1682	7255	2126	78.4	14.0	92.4
CI-SH745-15	15	955	6150	1802	7774	2278	84.0	15.0	99.0
CI-SH745-16	16	1016	6560	1923	8292	2430	89.6	16.0	105.6
CI-SH745-17	17	1078	6970	2043	8810	2582	95.2	17.0	112.2
CI-SH745-18	18	1139	7380	2163	9328	2734	100.8	18.0	118.8
CI-SH745-19	19	1201	7790	2283	9847	2886	106.4	19.0	125.4
CI-SH745-20	20	1262	8200	2403	10365	3038	112.0	20.0	132.0
CI-SH745-21	21	1323	8610	2523	10883	3190	117.6	21.0	138.6
CI-SH745-22	22	1385	9020	2644	11401	3341	123.2	22.0	145.2
CI-SH745-23	23	1446	9430	2764	11920	3494	128.8	23.0	151.8
CI-SH745-24	24	1508	9840	2884	12438	3645	134.4	24.0	158.4
CI-SH745-25	25	1569	10250	3004	12956	3797	140.0	25.0	165.0
CI-SH745-26	26	1630	10660	3124	13474	3949	145.6	26.0	171.6
CI-SH745-27	27	1692	11070	3244	13992	4101	151.2	27.0	178.2
CI-SH745-28	28	1753	11480	3365	14511	4253	156.8	28.0	184.8
CI-SH745-29	29	1815	11890	3485	15029	4405	162.4	29.0	191.4
CI-SH745-30	30	1876	12300	3605	15547	4557	168.0	30.0	198.0
CI-SH745-31	31	1937	12710	3725	16065	4708	173.6	31.0	204.6
CI-SH745-32	32	1999	13120	3845	16584	4860	179.2	32.0	211.2
CI-SH745-33	33	2060	13530	3965	17102	5012	184.8	33.0	217.8
CI-SH745-34	34	2122	13940	4086	17620	5164	190.4	34.0	224.4
CI-SH745-35	35	2183	14350	4206	18138	5316	196.0	35.0	231.0
CI-SH745-36	36	2244	14760	4326	18657	5468	201.6	36.0	237.6
CI-SH745-37	37	2306	15170	4446	19175	5620	207.2	37.0	244.2
CI-SH745-38	38	2367	15580	4566	19693	5772	212.8	38.0	250.8
CI-SH745-39	39	2429	15990	4686	20211	5924	218.4	39.0	257.4
CI-SH745-40	40	2490	16400	4807	20730	6076	224.0	40.0	264.0

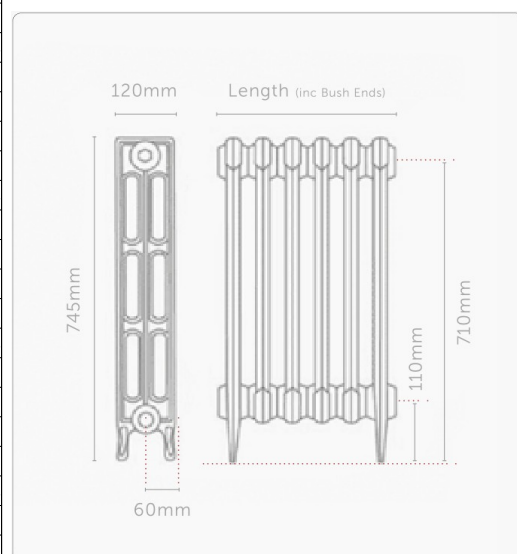

Lengths quoted are overall including bush ends and are given in good faith. However, due to the nature of the manufacturing process tolerances can and should be expected. Quoted dimensions should therefore only be used as a guideline.